


SB115 Series Two-position Two-way Solenoid valve

SB115

Small dimension, fast action and low noise.



Ordering Code

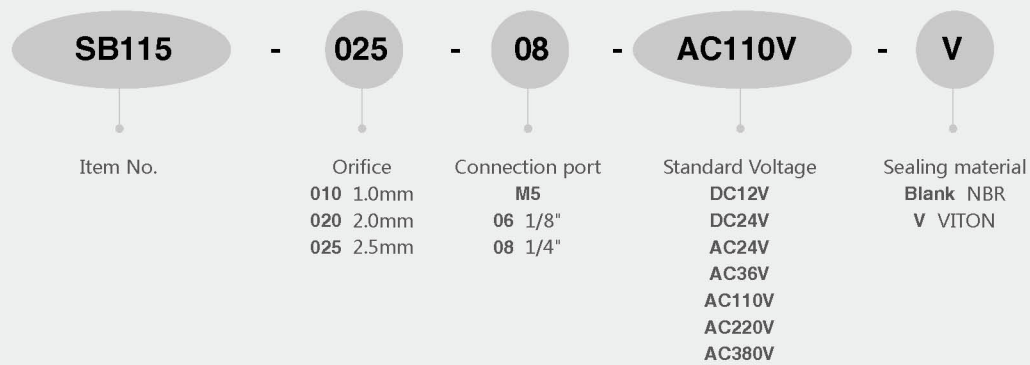


Specification

Model	SB115-010-M5	SB115-020-06	SB115-025-08
Media	Air / Water / Oil		
VOLTAGE	Direct action		
Pattern	Normally close		
Orifice	1.0mm	2.0mm	2.5mm
Cv Value	0.10	0.23	
Connection ports	M5	1/8"	1/4"
Fluid viscosity	< 20CST		
Working pressure	0~0.8MPa	0~1.6MPa	0~0.7MPa
Max. pressure	1.2MPa	2.4MPa	1.2MPa
Working temp	DC12-24V/AC24V-380V ±10%		
Protection class	IP65		
Power consumption	AC :6.5VA DC: 6W		
Insulation class	F class		
Valve body material	Aluminum / Brass / Stainless steel		
Seal material	NBR or VITON		
Response time	0.05S		

Overall Dimension



SB115-010

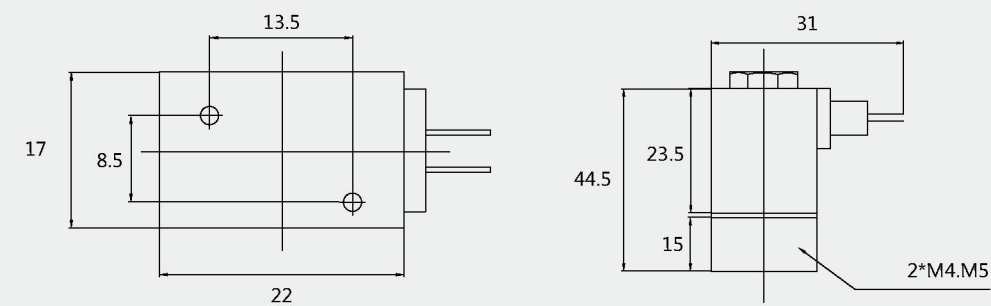

SB115-025

